



○ 完美设计 有效减震


专为残肢过长截肢者设计，满足其对全能假脚的需求。大分叉结构，内、外翻功能好，适合所有路况，更加安全。具有完美的高能量存储和返还功能。

Special design for long stump, provide the best function for patients. Split toe can provide the multi-direction ankle function, available for various ground, with the shock absorb function, makes walk easy and comfortable. Perfect energy store and energy return function.

结构示意图/Structure sketch map



重力线/Weight line

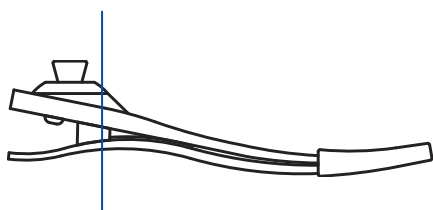

操作台对线/Bench alignment

矢状面: 根据患者的需要, 引入正确的接受腔屈曲度和跟高。定位重力线, 在髌韧带高度上平分接受腔, 并降至连接杆的前缘。

冠状面: 根据患者的需要, 引入正确的接受腔内收/外展。定位重力线, 在髌韧带高度上平分接受腔, 并以中立的ML位降至脚关节的中心线处。设立正确的脚趾外转度。

Sagittal Plane:

- Introduce the appropriate socket flexion and heel height, according to the amputee's requirements.
- Position the weight line, taken from the center of the socket at the patellar tendon level, so that it falls along the anterior edge of the pylon.

Coronal Plane:

- Introduce the appropriate socket adduction/abduction, according to the amputee's requirements.
- Position the weight line, taken from the center of the socket at the patellar tendon level, so that it falls along the midline of the foot module in a neutral M-L position.
- Set appropriate toe-out.

产品特点/Specifications

- ◆ 专为残肢过长截肢者设计, 满足其对全能假脚的需求。
- ◆ 大分叉结构, 内、外翻功能好, 适合所有路况, 更加安全。
- ◆ 具有完美的高能量存储和返还功能。
- ◆ 有效的垂直减震功能, 减低了对残肢末端、膝关节、髋关节和脊椎造成的冲击。
- ◆ 仿真足弓弹板以在屈曲、伸展时通过减震及脚板屈曲来提高脚跟着地时的稳定性。
- ◆ 个性化设计, 九级重量活动等级供选择, 最高承重达166KG。
- ◆ Special design for long stump, provide the best function for patients.
- ◆ Split toe can provide the multi-direction ankle function, available for various ground, with the shock absorb function, makes walk easy and comfortable.
- ◆ Perfect energy store and energy return function.
- ◆ Effective vertical shock absorption function, decrease the impact to the stump, knee, hip and spine.
- ◆ Artificial arch spring enhances stability at heel strike through shock absorption and flexion as the artificial spring flexes and extends.
- ◆ Customized design, 9 activity/weight categories and Weight limit up to 166KG.

参数/Clearance & Weight

尺码/ Size	有效高度/Clearance	重量/Weight
22-25cm	4.6cm	0.3KG
26-28cm	5.1cm	0.37KG
29-31cm	5.6cm	0.43KG

扫描二维码, 获取更多信息



美国优邦假肢矫形器有限公司
USA YOBAND PROSTHETIC & ORTHOPAEDIC CO., LTD

美国总部地址: 美国德拉瓦州多佛市南杜邦公路3500号
U.S. Headquarters Address: 3500 South DuPont Highway, Dover, Delaware
Website: www.usa-yoband.com E-mail: usa-yoband@usa-yoband.com
免费客服电话 (Hot free service phone): 400-820-3346 800-988-1228